




Analog input setpoint Entrée de commande analogique		Position transmitter option / Option recopie de position	
Torque transmitter option Option recopie de couple		16 17 mA 12 to 32VDC (1)	12 14 13 15 mA 12 to 32VDC (1)
		Raccordement pour 4/20mA (2 fils) Connection for 4/20mA (2 wires)	
		12 14 13 15 mA 12 to 32VDC (1)	
		Raccordement pour 4/20mA (3 fils) Connection for 4/20mA ou 0/20mA (3 wires)	
(1) Possibilité d'utiliser l'alimentation 24 Vcc des bornes 8-9 (1) Possibility to use 24 Vdc supply on terminals 8-9			

		4 rue d'Arsonval BP 91 95505 GONESSE CEDEX TEL. +33 (0)1 34 07 71 00 FAX. +33 (0)1 34 07 71 01 www.bernardcontrols.com	
Projet/Project: PBCD116010		Etude/Study: DM_18389	
Dessiné par: Designed by: G.Hou 09/11/2018	Vérifié par: Checked by: H.Delaraux 12/11/2018	Validé par: Validated by: D.Schweibel 12/11/18	Approuvé/Approved PROD -> -> A.Le Gall 05/12/2018

AT/AQ-25 à 250 TRIPHASEE LOGIC THREE PHASE AT/AQ-25 to 250 LOGIC	
Positionneur Positioner	
WD_630031_FREN	Ind./Rev.: E

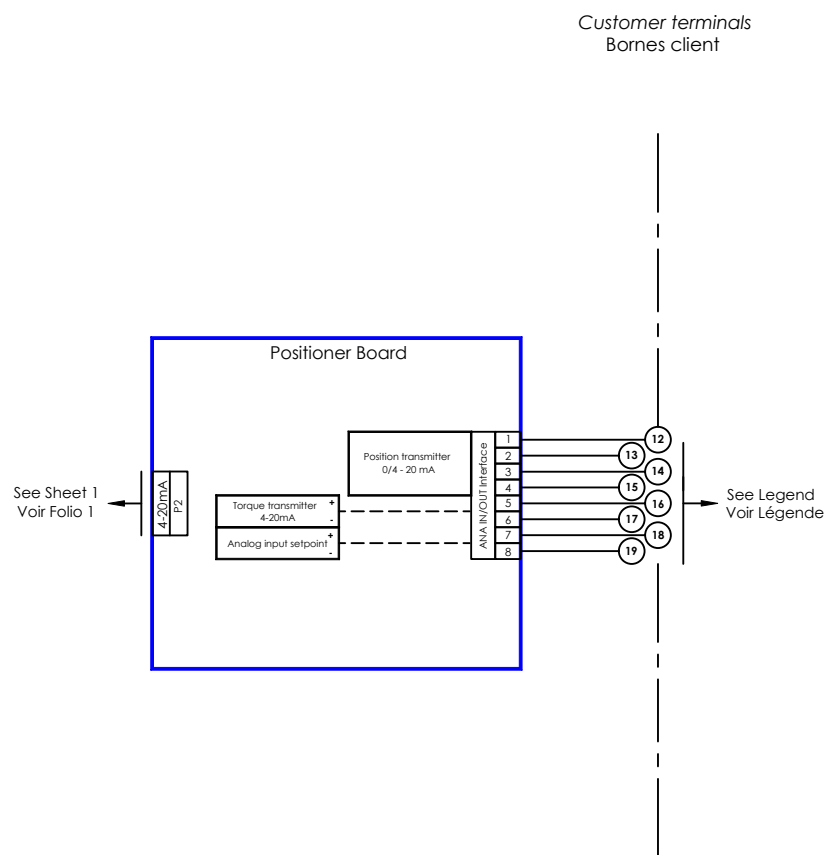