

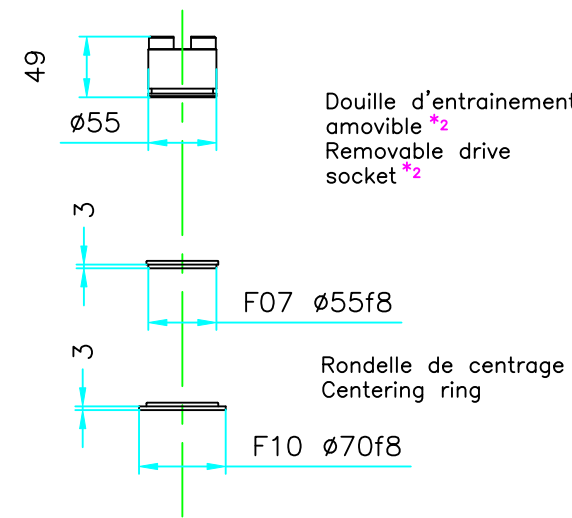
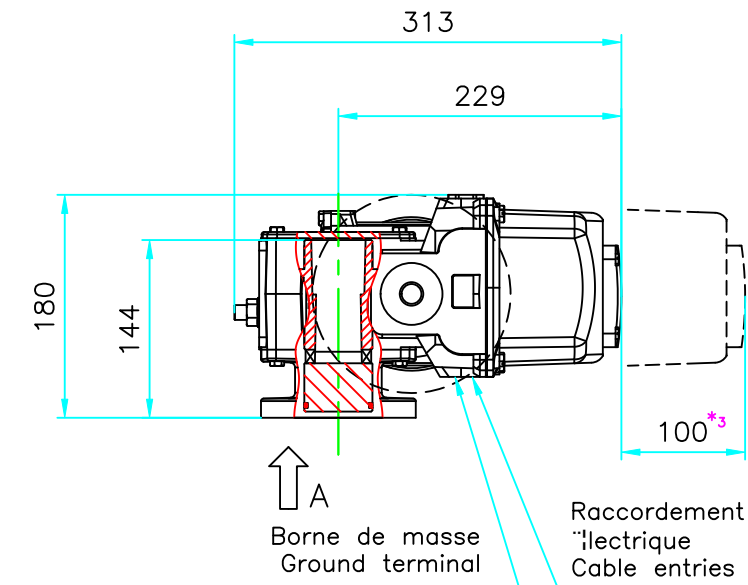


D'brayage volant
Declutching wheel


Indicateur de position
Position indicator

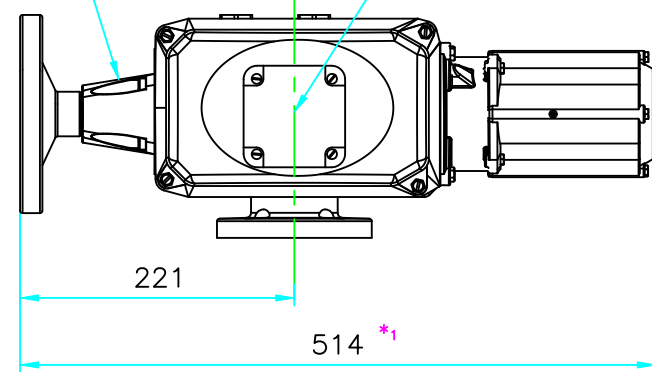


Butées réglables limitant la rotation ± 90° (+/- 2°)
Adjustable mechanical end stops 90° (+/- 2°)

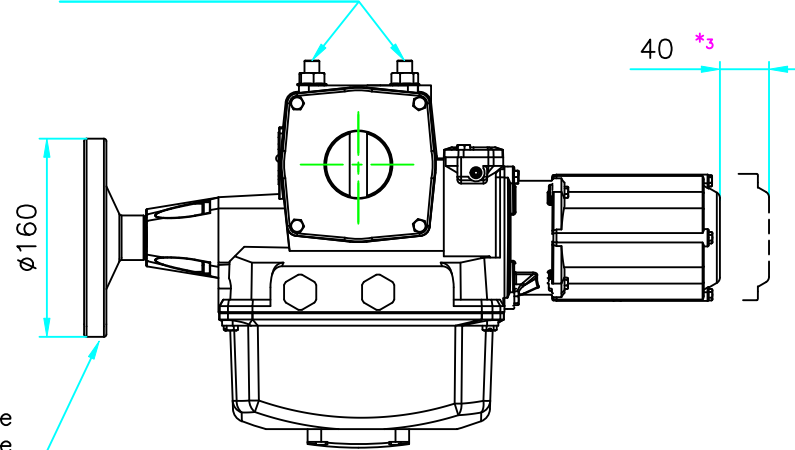

ISO 5211
F07/F10
Vue A de la bride
View A of the flange

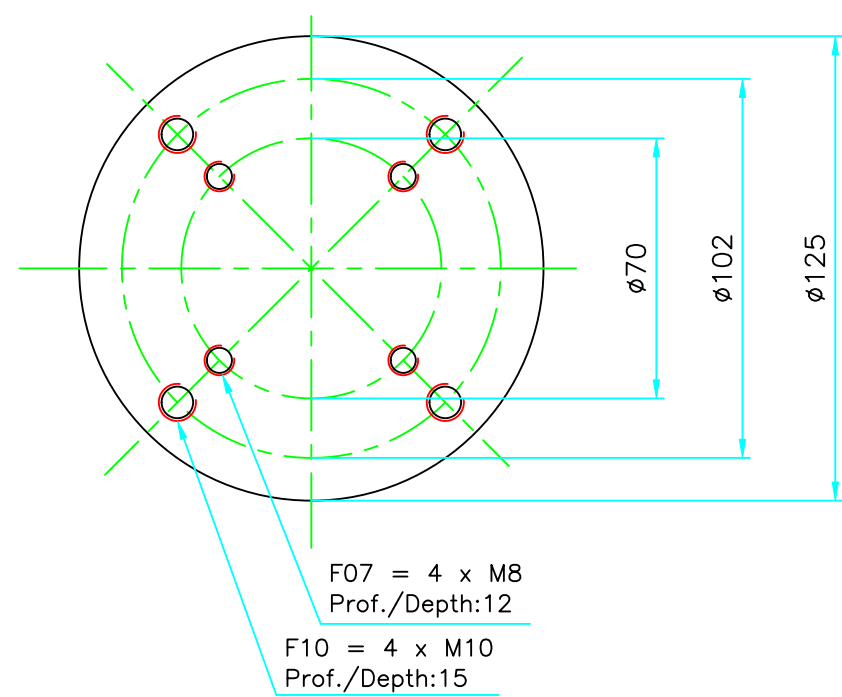

BERNARD CONTROLS
4 rue d'Arsonval BP 91
95505 GONESSE CEDEX
TEL. +33 (0)134077100 FAX. +33 (0)134077101
www.bernardcontrols.com

NOTA: Plan non contractuel/No contractual Draft *₁ - L'actionneur est repr"i sent"i dans sa taille maximale. The actuator is represented in its maximale size. *₂ - Repr"i sentation de la douille en position ferm"i e. Representation of the socket in closed position. *₃ - C"ote de d"i montage/Dimension to allow for disassembly			Masse/Weight: 15 kg Unit"es/Units: mm	Encombrement / External Dimensions SQ25 (Op.Time / Tempo > 10s) Etanche/Weatherproof None Switch Switch			
Vitesse/Speed: ALL rpm	Forme/Form: SOCKET	Bride/Flange: F07F10	 Fr/En		Echelle/Scale: 1/6 - 1/2 Planche/Sheet: 1/1 CD_05338_FR_EN Modification: Ind./Rev.: A		
Dessin"e par: Designed by: A.Cao 20/06/22	V"erifi"e par: Verified by: G.Liu	Approuv"e par: Approved by: F.Han 21/06/22					