



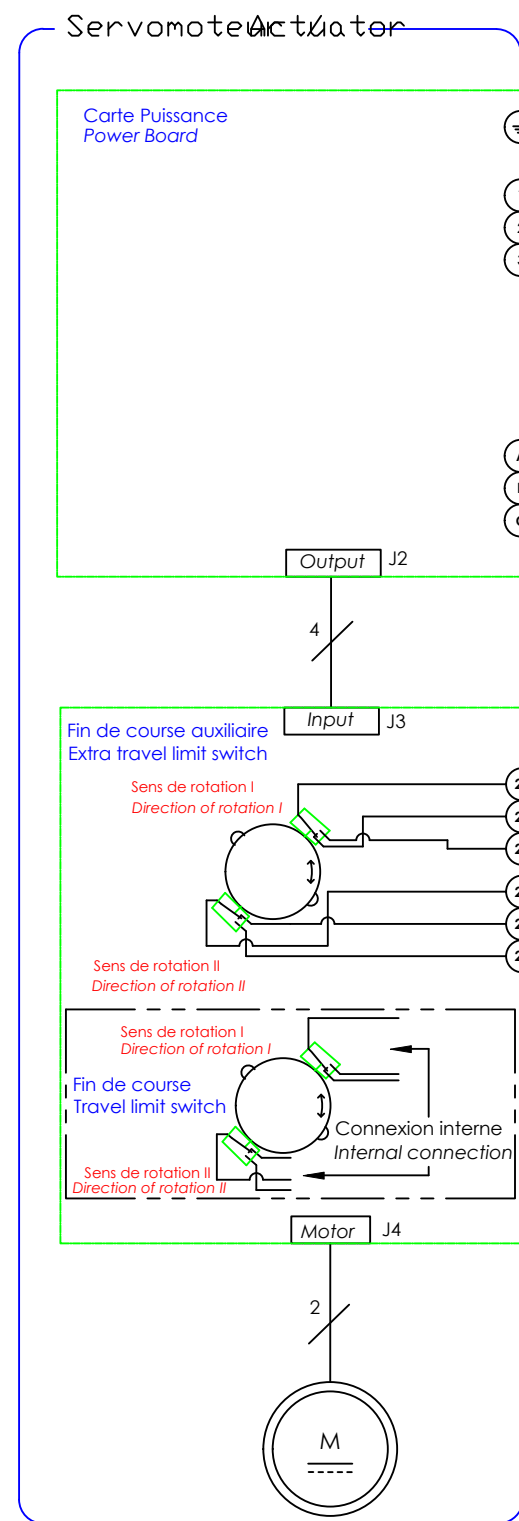

Câblage Client Recommandé / Recommended Customer wiring

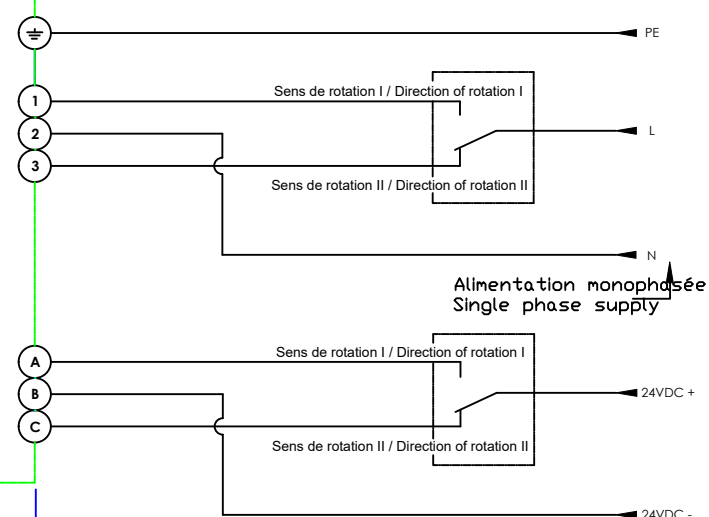

Direction of rotation	Sens de rotation
I) anticlockwise (normally opening)	I) sens antihoraire (cas général pour l'ouverture)
II) Clockwise (Normally closing)	II) sens horaire (cas général pour la fermeture)

Alimentation 85 - 260VAC, 50/60Hz ou 24VDC
NE PAS ALIMENTER EN MONOPHASE et COURANT
CONTINU EN MEME TEMPS.

Power supply 85 - 260VAC, 50/60Hz or 24VDC
DO NOT SUPPLY AC AND DC IN THE SAME TIME.



4 rue d'Arsonval BP 91
95505 GONESSE CEDEX
TEL. +33 (0)1 34 07 71 00
FAX. +33 (0)1 34 07 71 01
www.bernardcontrols.com

Ce plan étant notre propriété, il ne peut être reproduit ou communiqué sans notre autorisation écrite.
This drawing is our property and may not be reproduced or communicated without our written authorization.

Projet/Project: 15M24		Etude/Study:		Modification: DM_22195	
Dessiné par: Designed by: NCA 17/08/22	Vérifié par: Checked by: A.Le Gall 19/08/22	Approuvé/Approved PROTO -> ->	Approuvé/Approved PROD A.Le Gall 19/08/22	WD_500032_FREN	Ind./Rev.: H

AQL/AQXL MONOPHASE - 24VDC PRECABLE
SINGLE PHASE - 24VDC AQL/AQXL PREWIRED

Planche/Sheet: