

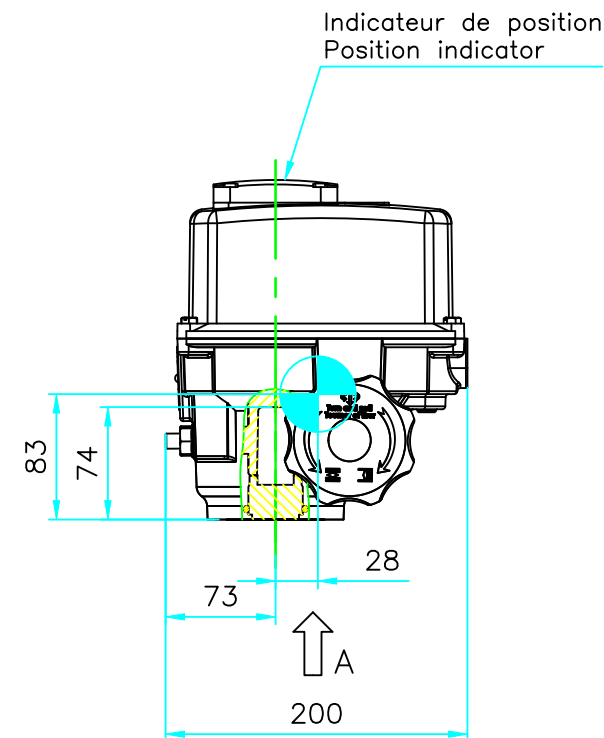
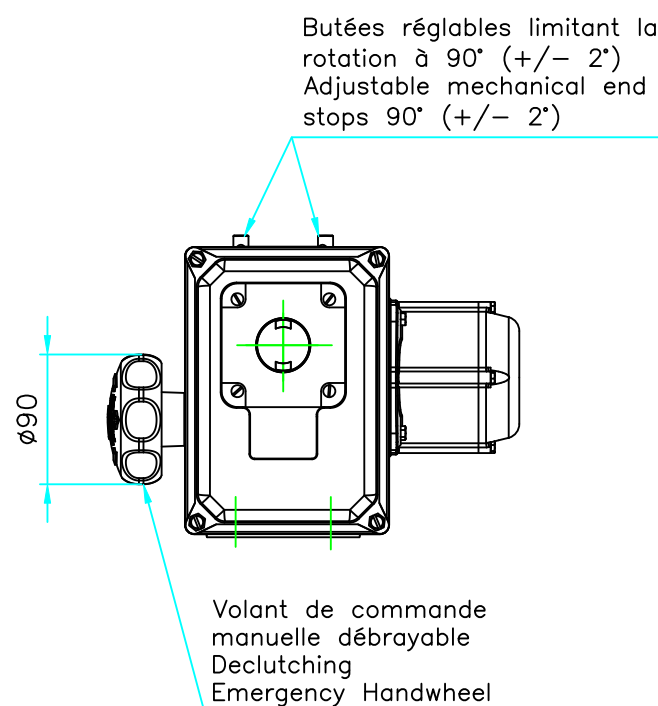
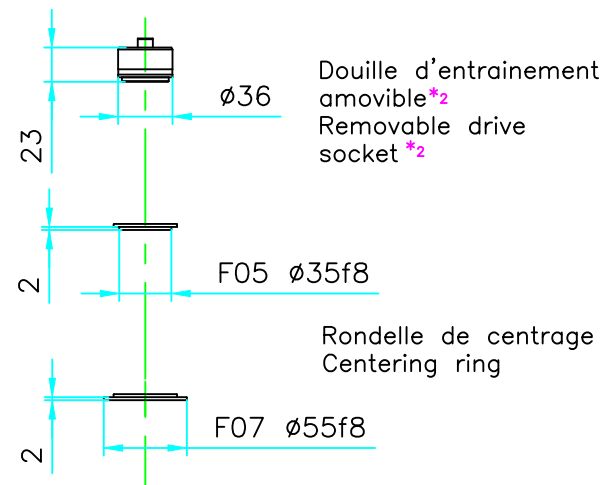


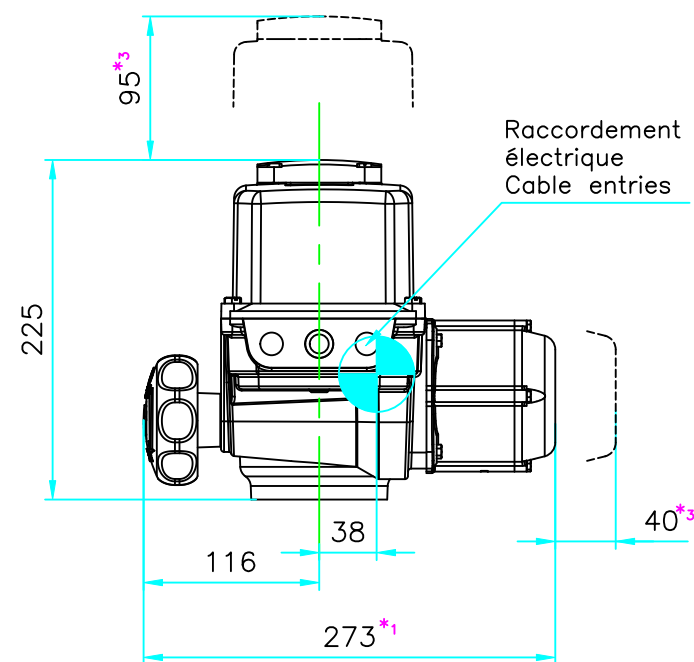

ISO 5211
Vue A de la bride
View A of the flange
Echelle/Scale: 1/2

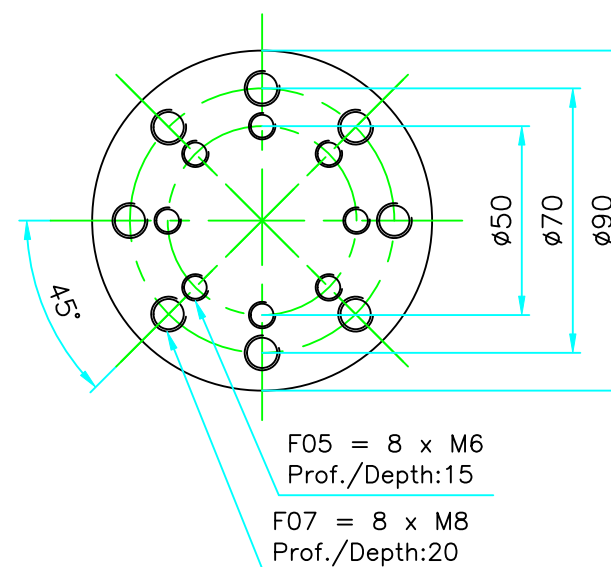


Centre de gravité
Center of gravity

BERNARD CONTROLS

4 rue d'Arsonval BP 91
95505 GONESSE CEDEX
TEL. +33 (0)134077100 FAX. +33 (0)134077101
www.bernardcontrols.com

Ce plan étant notre propriété, il ne peut être reproduit ou communiqué sans notre autorisation écrite.
This drawing is our property and may not be reproduced or communicated without our written authorization.

NOTA: Plan non contractuel/No contractual Draft			Masse/Weight:		Encombrement / External Dimensions SQ-6 Etanche/Weatherproof None Switch Switch				
* ₁ - L'actionneur est représenté dans sa taille maximale. The actuator is represented in its maximale size.			7 kg						
* ₂ - Représentation de la douille en position fermée. Representation of the socket in closed position.			Unités/Units:						
* ₃ - Côte de démontage/Dimension to allow for disassembly			mm						
Vitesse/Speed: 5.0 rpm	Forme/Form: SOCKET	Bride/Flange: F05F07	 Fr/En						
Dessiné par: Designed by: M.Birouk 30/08/23	Vérifié par: Verified by: A. Doise	Approuvé par: Approved by: C.Tharmara 01/09/23							
					Echelle/Scale: 1/5	Planche/Sheet: 1/1	CD_06150_FR_EN	Modification:	Ind./Rev.: A

A3