



STANDARD

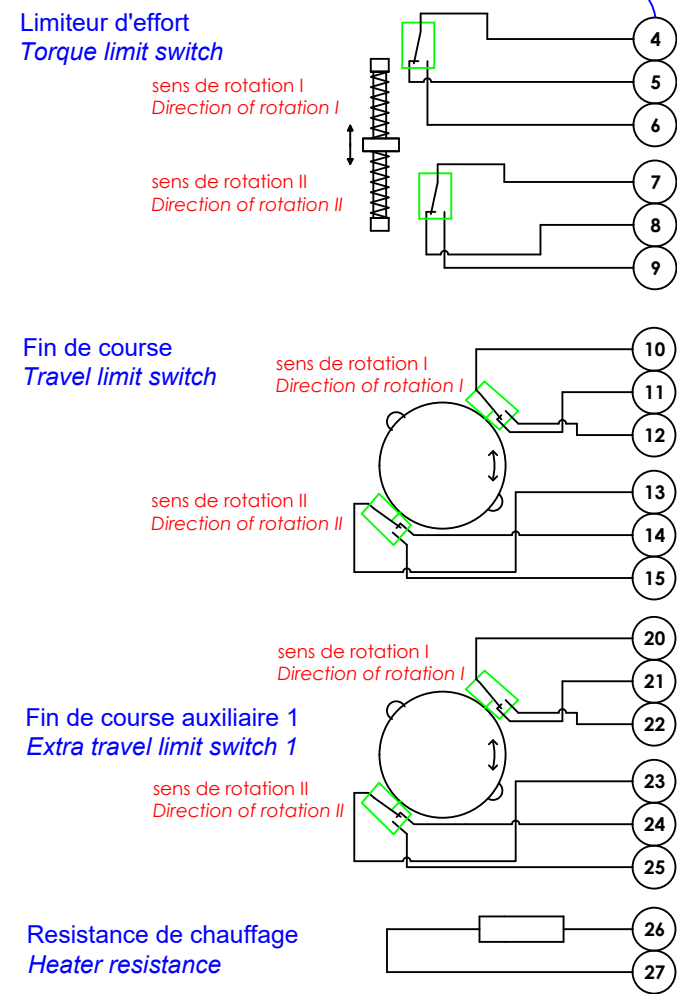

OPTION 1:


Potentiomètre
Potentiometer



OPTION 2:

Transmetteur de Position
Position transmitter

Transmetteur de Position 4-20mA
Position transmitter 4-20mA

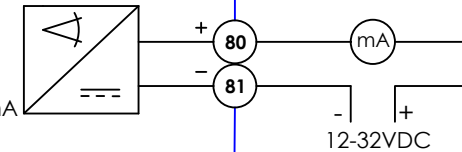


Légende/Legend

Direction of rotation
I) anticlockwise
(normally opening)
II) Clockwise
(Normally closing)

Sens de rotation
I) sens antihoraire
(cas général pour l'ouverture)
II) sens horaire
(cas général pour la fermeture)

MOTEUR

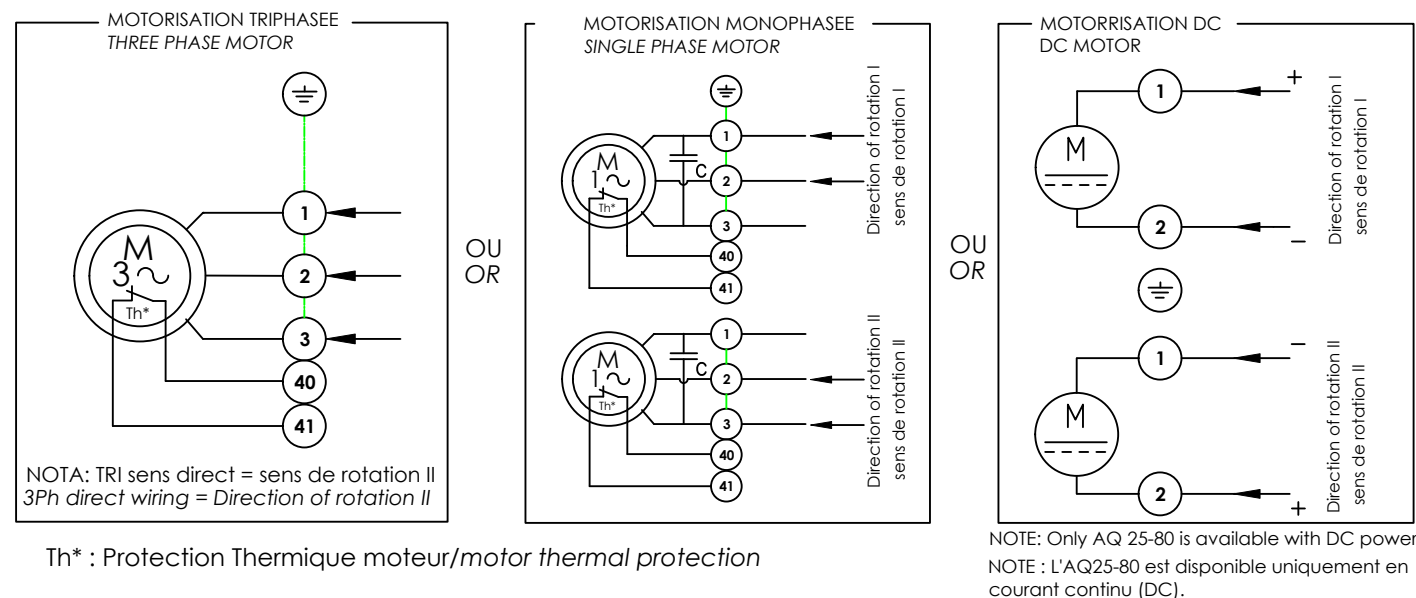

4 rue d'Arsonval BP 91
95505 GONESSE CEDEX
TEL. +33 (0)1 34 07 71 00
FAX. +33 (0)1 34 07 71 01
www.bernardcontrols.com

Ce plan étant notre propriété, il ne peut être reproduit ou communiqué sans notre autorisation écrite.
This drawing is our property and may not be reproduced or communicated without our written authorization.

AT/AQ-25 to 100 1PH/3PH/CC SWITCH
1PH/3PH/DC AT/AQ-25 to 100 SWITCH

4 Fins de Course, 2 Limiteur d'Effort, Potentiomètre, TAM
4 Travel Limit Switches, 2 Torque Limit Switches, Potentiometer, TAM

Projet/Project:	Etude/Study:	Modification:
	DE_25177	
Dessiné par: Designed by:	Vérifié par: Checked by:	Approuvé/Approved PROTO
C.ZHAO 23/07/25	NCA 24/07/25	-> ->
		Approuvé/Approved PROD
		RCO 25/07/25

WD_500569_FR_EN

Planche/Sheet:
1/1

Ind./Rev.:
A